



GO4TV



INSTALLATION AND SETUP MANUAL

GO4YU OASIS ONE SET TOP BOX


CONTENT OF THE PACKAGE

Inside the package, there are:



(a)

GO4YU OASIS ONE
Set Top Box device (receiver)

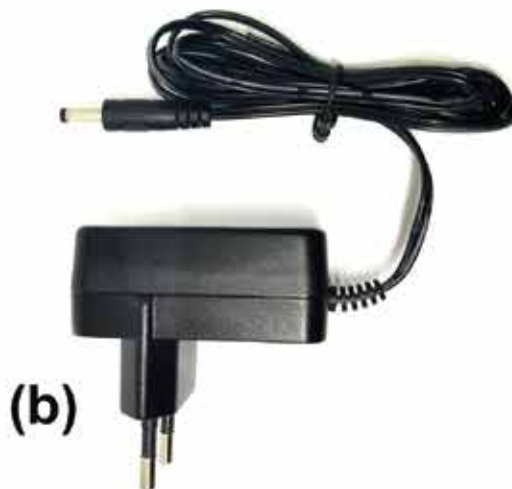

(b)

POWER ADAPTER
(transformer - DC 5V, 1A)



(c)

REMOTE CONTROL



(d)


Cable with connectors
for analog connection
to the TV

DEVICE APPEARANCE


Right side of the device



Back side of the device

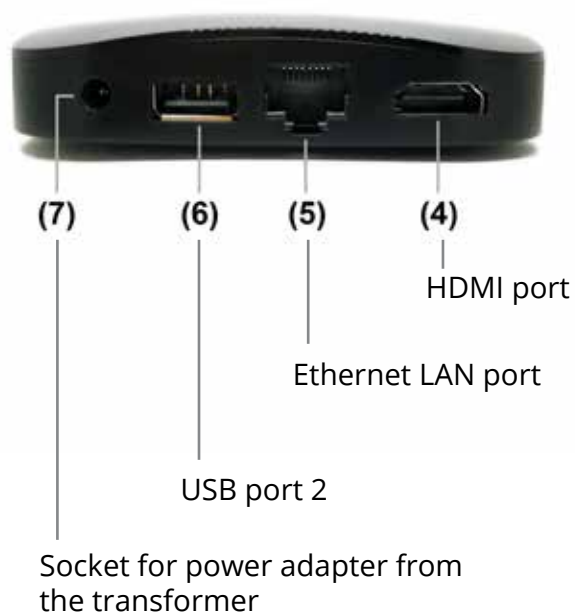

Front side of the device

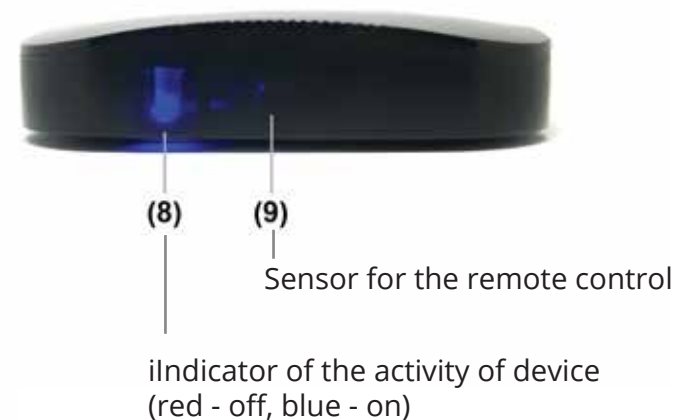

CONNECTIVITY



The device can be connected in two ways, depending on the type of TV you have.

New generation models which have a port for HDMI cable:

HDMI cable is inserted into the port which is located on the back side of the STB device (port number 4).

HDMI cable is not a part of equipment which is contained in the package.



For older TV models:

Insert the cable which you found in the package (side 1, label "d") into the port which you can find on the right side of the STB, just as it is presented in the photograph.

On the other side of the cable, there are yellow (video) and red and white (audio) connectors which should be inserted into the appropriate connectors on the TV (they are marked with the same colors).

CONNECTIVITY



After that, insert one side of the network cable into port 5 and the other side into the router, i.e. the device you use to connect to the internet.



Into the port 7 insert the power adapter from the transformer (b), plug all of it in the power socket and your device is ready for use.

POVEZIVANJE

If everything is properly connected, it should look like this:



For TVs with HDMI port




For TVs without HDMI port

INSTALLATION



After you turn on the device for the first time, it will be necessary to set up some basic options which are a part of Settings Wizard.

Select the language to display on the screen.

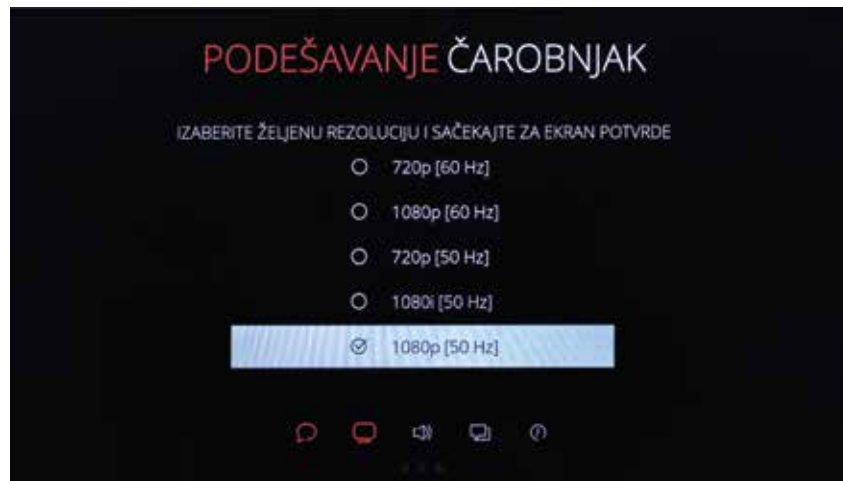

Use arrows to go to the next screen where you should select the resolution.

Depending on your A/V connection, select the appropriate option.

- If STB is connected to the TV via HDMI cable, then select '1080p (50 Hz)' option.
- In case the connection is analog, you should select 'PAL (576i)'.

INSTALLATION



On the screen where modes of the digital audio output are listed, you should select 'PCM'.



Network setup screen


If the STB device is properly connected to the local network and everything is properly configured, you should see here all the parameters of the network.

INSTALLATION



Network settings

It is recommended that the STB device gets all network settings automatically from the router, i.e. the device that is used to connect to the internet. When you open the screen to set up Network settings, an option 'AUTO (DHCP)' should automatically be selected.

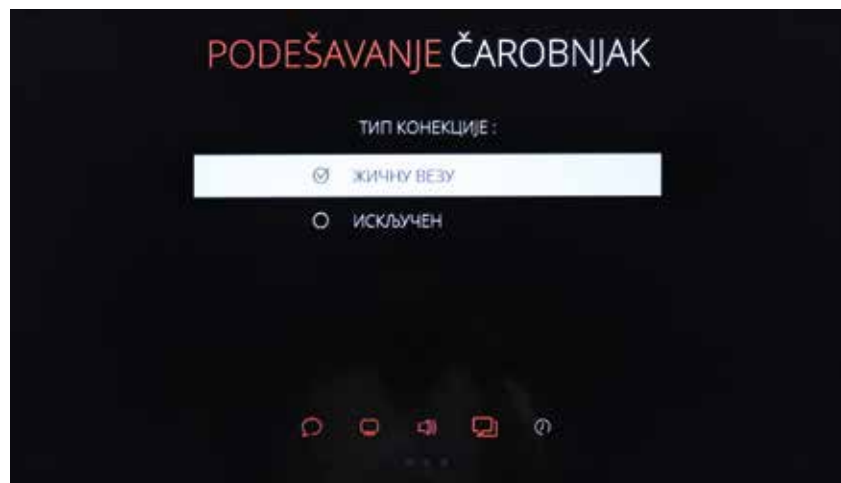

Type of connection

After selecting 'Wired connection' as a 'Type of connection', select the same-name option to go to the next screen.

INSTALLATION



Select the time format - either "12-hour" or "24-hour" format.




Select the time zone
(For most countries, only one zone will be listed here).

INSTALLATION



By selecting this last option with the right arrow and by pressing the button ENTER, the device will turn on with these new parameters implemented.



In case you need to change something, you can always press  button on your remote control and make the necessary changes.

INSTALLATION



The following is the usual procedure for entering a PIN and logging in to the device.

Device PIN is 1111